





## ARMOURED SHIELDS

Intended to protect walls and door faces, the shield is made up of a rubber covering, an impact damper that resists to shocks and break and which is molded from a casting, to 3 mm thick galvanized armor plating. It guarantees great impact absorption and a good resistance to distortion. Available in the following size: 600 x 600 and 500 x 300, it can be used flat, arched or in the form of U in a ninety-degree angle or any other value. If requested, the product can be delivered with a non-oxidizing metal sheet and a food rubber.

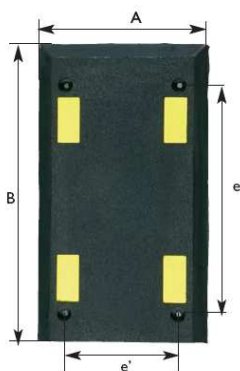

### DIMENSIONAL CHARACTERISTICS



Reference	A (mm)	B (mm)	Thk (mm)	e (mm)	é (mm)
SE60.19.22	600	600	27	500	500
SE60.19.24	300	500	25	400	200
SE60.19.21 (90°)	----	600	27	500	500
SE60.19.25 (90°)	----	500	25	400	200
SE60.19.30	200	800	25	625	145

### TECHNICAL CHARACTERISTICS

Quality	Hardness shore A	Resistance					
		Break Mpa	At elongation	Break	Oils	detergents	Acids
EPDM	70/75	11.5	280%	46 kN/m	Medium	Excellent	Excellent

Quality	Fire classification	Accessories	Resistance to ultraviolets	Antifungic treatment
EPDM	Without	3mm thick galvanized metal sheet	Excellent	No