




## STANDING ARMORED SHIELDS

The self-supporting armored shield stands on a galvanized tube (50mm x 50mm) and allows dissociating the protection from the structure to be protected.

It is particularly suitable to protect machines, bungalows, sidings, waterfalls...

The standing armored shield has the same characteristics as the armored shield

### DIMENSIONAL CHARACTERISTICS

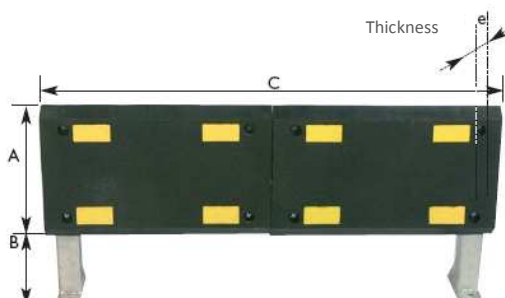

REfErence	A (mm)	B (mm)	C (mm)	e (mm)
SE60.19.27/P	300	150	1,000	25
SE60.19.28/P	300	150	1,500	25
SE60.19.29/P	300	150	2,000	25



Reference	A (mm)	B (mm)	C (mm)	D Ø screw(mm)	r (mm)
SE60.19.26/P	300	150	450	M12	300

### CARACTERISTIQUES TECHNIQUES

Quality	Hardness shore A	Resistance					
		Break Mpa	At elongation	Break	Oils	detergents	Acids
EPDM	70/75	11.5	280%	46 kN/m	Medium	Excellent	Excellent

Quality	Fire classification	Accessories	Resistance U.V	Antifungic treatment
EPDM	Without	Galvanized steel stand	Excellent	No