





SHOCK BUMPER

The shock bumper is attached to the ground and protects production machines, conveyors, stocking racks, sidings, walls and buildings. It is particularly designed to stop efficiently handling systems by absorbing impacts up to wheels or on a low point of the equipment. The yellow/black colored shock bumper allows it to identify the different traffic zones in order to protect efficiently the company's workforce and equipments.

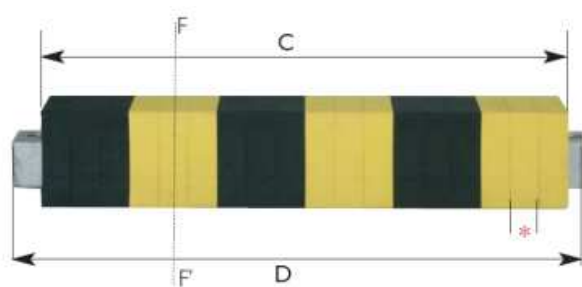

Section - To be fixed on the ground, 2 M 16 screws are necessary



Setion

DIMENSIONAL CHARACTERISTICS



Reference	A (mm)	B (mm)	C (mm)	D (mm)
SE60.18.02/1	164	158	900	1,000
SE60.18.02/2	164	158	1,400	1,500
SE60.18.02/3	164	158	1,900	2,000
*SE60.18.02/4	164	158	Thickness : 50 mm	

* Yellow/black spare washer, 50 mm thick

TECHNICAL CHARACTERISTICS

Quality	Hardness shore A	Resistance					
		Break Mpa	At elongation	Break	Oils	Detergents	Acids
SEBS	70/75	6.3	570%	23 kN/m	Good	Excellent	Excellent

Quality	Fire classification	Accessories	Resistance to ultraviolets	Antifungic treatment
SEBS	M4	Tube 80 mm x 80 mm	Excellent	No