




WEDGE FOR IMMOBILIZATION

The security wedge for immobilizing vehicles is molded in EPDM, an elastomer renowned for its excellent resistance to ultraviolet rays, salt, abrasion (strong adhesion to the ground and to tyres). The wedge's geometry presents 3 grasping handles for an easy transport and a 25 mm bore in order to use a check chain.

DIMENSIONAL CHARACTERISTICS

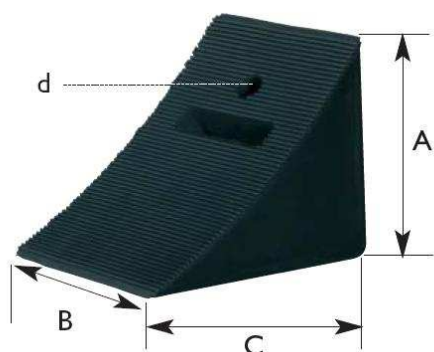

Reference	A (mm)	B (mm)	C (mm)	d Ø (mm)
SE50.02.11	190	175	250	25

TECHNICAL CHARACTERISTICS

Quality	Hardness shore A	Resistance					
		Rupture Mpa	At elongation	Break	Oils	detergents	Acids
EPDM	80	11.5	280%	46 kN/m	Good	Excellent	Excellent

Quality	Fire classification	Accessories	Resistance to ultraviolet rays	Antifungal treatment
EPDM	Without	-----	Excellent	No

CARRIAGE COSTS ARE CALCULATED ACCORDING TO THE DELIVERY POINT