

RUBBER BUMPER FOR HANDLING QUAY

Presentation

Made up of compact molded rubber, the quay and handling bumper protects buildings against impact or shock risks that occur during goods loading or unloading.

Fixed by sealed pins or an expansion screw, the bumper could be vertically or horizontally arranged. Resistant to hydrocarbon emissions.

Characteristics

Material :	SBR naturel rubber	
Color :	Black	
Hardness :	60/65 Shores A (black)	
Resistance :	Oils	Medium
	Detergents	Excellent
	Acids	Excellent
	Ultraviolets	Excellent
	At elongation	450%
	Break	46 kN/m



RUBBER BUMPER FOR HANDLING QUAY

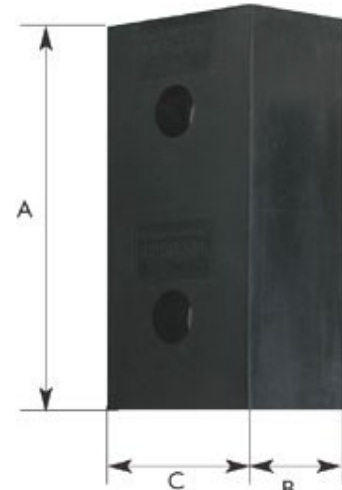
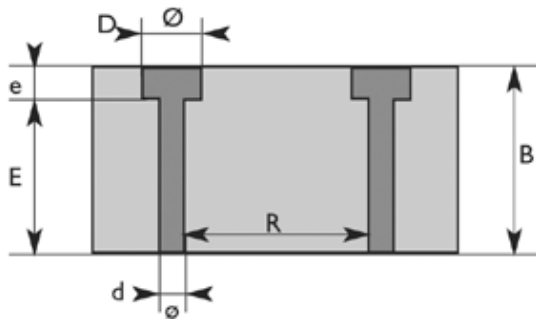


Figure 1

A (mm)	B (mm)	C (mm)	E (mm)	e (mm)	D Ø (mm)	d Ø (mm)	R (mm)	Weight (kg)	Unit price (Excl.tax)
400	140	200	90	50	50	20	200	13,2	95.15


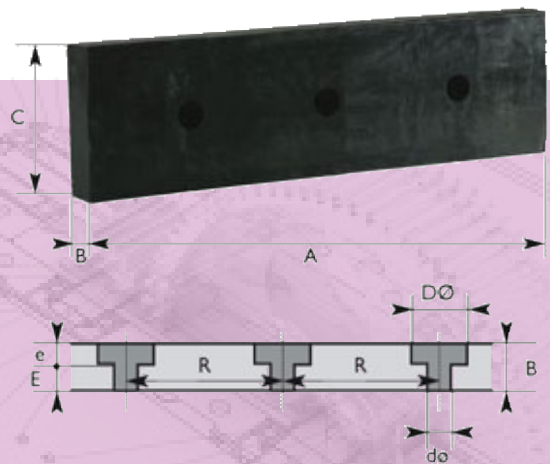


Figure 2

Fig	A (mm)	B (mm)	C (mm)	E (mm)	e (mm)	D Ø (mm)	d Ø (mm)	R (mm)	Weight (kg)	Unit price (Excl.tax)
2	600	50	170	25	25	33	16	300	5.6	75.37 €
2bis*	600	50	170	25	25	33	16	300	5.6	82.59 €
3	790	30	200	10	20	27	10	330	6.3	56.74 €

* Color: White

Please contact us before ordering to know stock availability

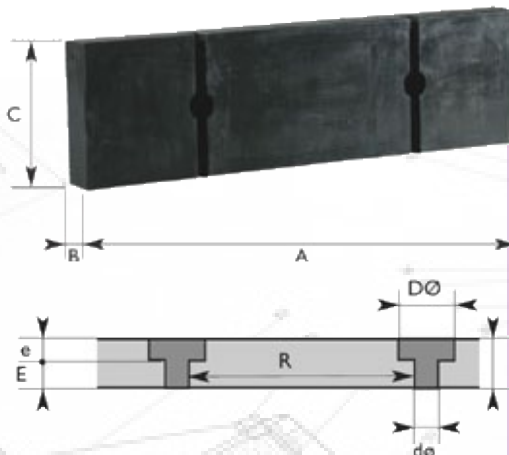

CARRIAGE COSTS ARE CALCULATED ACCORDING TO THE DELIVERY POINT

