

SE12-AF ANTI-FATIGUE MAT



For multiple workstations where upright posture is semi-static, the SE12-AF anti-fatigue mat is synonymous with comfort, whether you are walking or when you are in a static station (shorter than 60 minutes).

The SE12-AF anti-fatigue mat can be used per unit in the following size : 800 x 1,000 mm.

The SE12-AF anti-fatigue mat is to be used in front of multiple workstations machines thanks to a reversible and reliable clipsage system. Despite its low thickness (12 mm), we obtain, thanks to the low hardness of the mixtures and to the carpet's "waffle-like" geometry an important deformation.

The SE12-AF anti-fatigue is available in 4 versions :


- 1- Anti-fatigue mat for dry or damp contact without oil (standard)
- 2- Anti-fatigue mat for contact with oils
- 3- Anti-fatigue mat with anti-static protection
- 4- Anti-fatigue mat with a debouncing effect

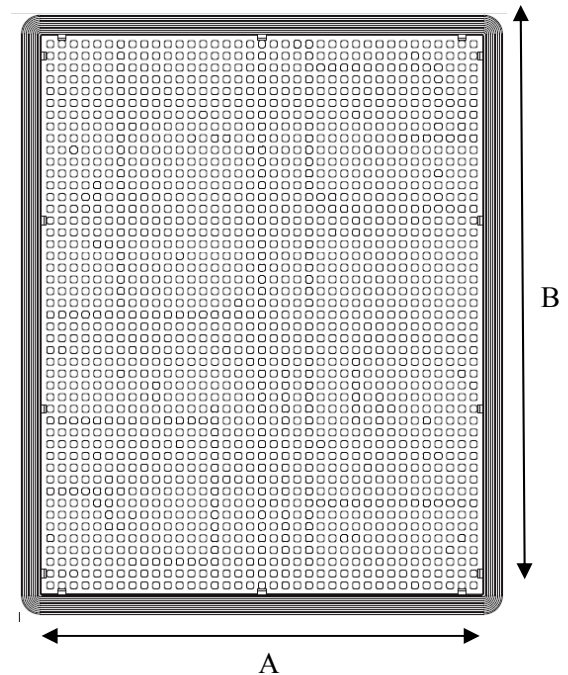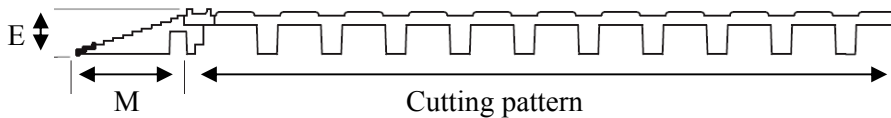

A (mm)	B (mm)	M (mm)	E (mm)	Color
800	1,000	38	12	Black

TARIFF (black EPDM standard quality – Hardness 25 Shores A) :

Single plate : 135.55 €Excl. tax

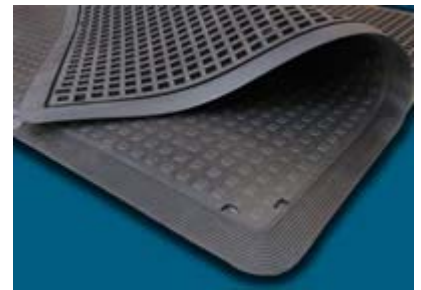

TECHNICAL CHARACTERISTICS

Quality	Hardness (Sh A)	Mechanical resistance			Characteristic
		Mpa break	AR	RD	
EPDM	25	3.8	800%	13 KN/m	Resistance to UV rays
Nitrile	50	4	500%	14 KN/m	Resistance to hydrocarbon
Norsorex	25	11	550%	15 KN/m	Debouncing
Nitrile	40	6	400%	18 KN/m	Anti-static $\leq 10^4\Omega$

Quality	Chemical resistance					
	Oils	Detergents	Skyrol	Acids	UV rays	
EPDM	Pauvre	Excellente	Excellente	Excellente	Excellente	Standard*
Nitrile	Excellent	Excellent	Poor	Excellent	Good	With delay
Norsorex	Good	Excellent	Poor	Excellent	Good	With delay
Nitrile	Excellent	Excellent	Poor	Excellent	Good	With delay

**The other models are available within approximately 4 weeks (please contact us to know our price list)*

CARRIAGE COSTS ARE CALCULATED ACCORDING TO THE DELIVERY POINT