




Pièces suivant plans



Étanchéité




Anti-vibratoire



Acoustique

## PARABLOND RUBBER

REF. SEA5CC60

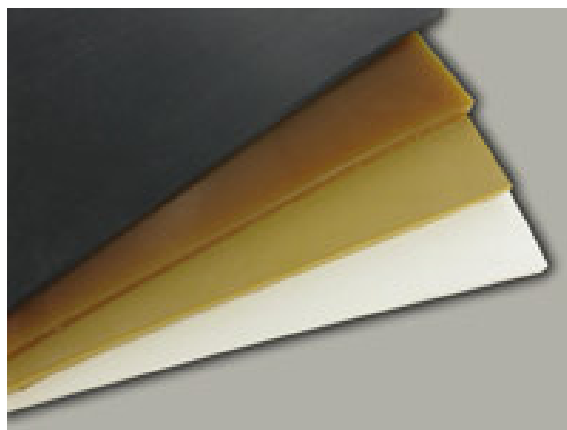

<b>Quality:</b>	NR/SBR
<b>Color:</b>	Blond/Brown
<b>Hardness:</b>	40 Shores A (+/-5)
<b>Density:</b>	(about) 1.06 g/cm <sup>3</sup>
<b>Break resistance:</b>	18 N/mm <sup>2</sup>
<b>Elongation at break:</b>	600 %
<b>Use temperature:</b>	-40/+70°C (+80°C short term)
<b>Persistent distortion at compression:</b>	25% (22h/70°C) (DIN ISO815)
<b>Ageing (70h/70°C):</b>	+3 Shores A/-10% break resistance

### Key characteristics:

Great elasticity, excellent mechanical characteristics  
Cannot stand oils and ultraviolet rays

### Standard uses:

Seals, parts cut according to plans...