




## BLACK CHECKER CARPET

### Technical data sheet

#### Advantages :

- Nonskid, antivibratory
- Reaction to fire according to SS ISO 3795: Test report P206031, Produces by the SP Swedish National Testing and Research Institute
- Comfortable when walking or during upright posture
- Acoustic insulator
- Easy to lay : can be installed on the floor without fixing
- Easy stick : the side covered with baize allows an easy and quick gluing (water-based adhesive)

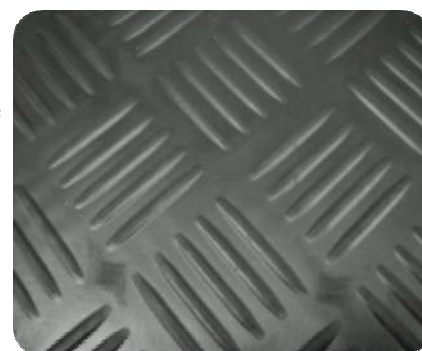

#### Applications :

- Floor covering adapted for industrial sites :paths, warehouses, locker rooms, machines and heavy duty equipment front without any mechanical or chemical constraint

#### Mechanical and physic-chemical properties :

	Caractéristiques mesurées	Valeur obtenue
<u>Mechanics</u>	Elastomer Density Hardness Break resistance (Rr) Elongation at break (Ar) Break (Rd) Abrasion 1/2 kg DRC 24h, 70°C Dimensional stability Deformation under load (28 days)	NR/SBR 1,50 Kg/dm <sup>3</sup> ± 0,05 70 Shore A ± 5 ≥ 4 MPa ≥ 200 % ≤ 350 mm <sup>3</sup> ≥ 15 kg/cm ≤ 40 % 0,15 % 0,25 %
<u>Ageing</u>	ΔDureté Shore A after 168h, 70°C ΔRr/Rr after 168h, 70°C ΔAr/Ar after 168h, 70°C	≥ + 10 ≤ ± 10 ≤ - 40
<u>Temperature</u>	Use temperature	-15/ +80 °C
<u>Acoustic insulation</u>	Reduction	20 dB