



BUMPER PROTECTION


Presentation

Highly malleable bumpers on 3 axes for a better impact dampening or during a vertical displacement at a level variation while loading or unloading trucks. Its geometry increases the effect of a simple rubber package, a flexible natural rubber with a high dampening ratio.

Its blade geometry is supported by a 10 mm thick heel that allows it to fit into all flat, arched or angle forms (protection of forklifts, handling systems, round or parallelepipedal posts...).

Fixing is ensured by two 8 mm diameter screws. The ends, at fixing points are reinforced by two molded and vulcanized E 24 steel washers (diameter 80 mm x thickness 3 mm)

Charactristics

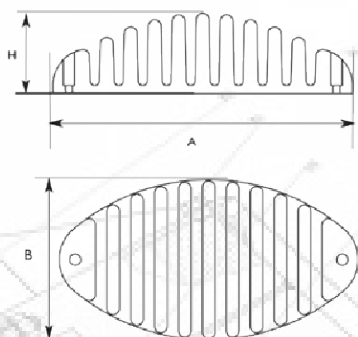

Material :	NR natural rubber										
Color:	Black										
Hardness :	62 Shores A										
Resistances :	<table> <tr> <td>Oils</td> <td>Poor</td> </tr> <tr> <td>Detergents</td> <td>Excellent</td> </tr> <tr> <td>Acids</td> <td>Excellent</td> </tr> <tr> <td>At elongation</td> <td>600%</td> </tr> <tr> <td>Break</td> <td>56 kN/m</td> </tr> </table>	Oils	Poor	Detergents	Excellent	Acids	Excellent	At elongation	600%	Break	56 kN/m
Oils	Poor										
Detergents	Excellent										
Acids	Excellent										
At elongation	600%										
Break	56 kN/m										

A (mm)	B (mm)	H (mm)	r (mm)	Color	Unit weight (kg)
380	200	100	50	Black	2,8

Tariffs

57,80 € HT

CARRIAGE COSTS ARE CALCULATED ACCORDING TO THE DELIVERY POINT

